



FSB 14T Mk II

SKU: S2077-0002

Sachtler FSB14T Mk II Fluid Head with
Touch & Go Camera Plate and Pan Bar –
Payload range: 0-16 kg / 0-35.3 lb



PRODUCT DESCRIPTION

Fluid, Smooth, Balanced: Capture the moment precisely

Redesigned with features from the revolutionary Sachtler aktiv fluid head range, FSB delivers precision movement with finely calibrated levels of drag and counterbalance for the perfect shot. The streamlined profile is built to withstand the toughest conditions to deliver repeatable, reliable camera support shot after shot.

Product Highlights

- **Smooth operation.**
Create precision pans with smooth starts and soft stops.
- **Finely balanced.**
Delivering smooth pan-tilt fluid actions to match any camera payload from 0kg.
- **Always on the level.**
Innovative illuminated PrismBubble visible from any height – day or night.
- **Built for endurance.**
Engineered to the highest standards with tough materials and precision components, FSB is built for endurance.

TECHNICAL SPECIFICATIONS

Range	FSB
Temperature Range	-40 °C to 60 °C -40 °F to 140 °F
Camera Plate	Touch & Go plate 16
Payload	0 kg to 16 kg 0 lb to 35.27 lb
Counterbalance	15 + 0 steps
Drag	7 + 0 drag settings
Weight	3.2 kg 7.05 lb
Bowl Size	100 mm
Pan Bar Count	1, telescopic
Sliding Range	70 mm 2.76 in
Tilt Range	90° to -70°
Pan Bar Length	35 cm to 52 cm 13.78 in to 20.47 in
Pan Bar Type	Pan bar DV right (telescopic)
Pan Bar Attachment	18/22/32 mm
Level Bubble	Yes, illuminated
Battery Type	CR2032



IN THE BOX

FSB 14T Mk II fluid head with telescopic pan bar DV and Touch & Go plate 16

- [Pan bar DV right \(telescopic\)](#) (3470)
- [Touch & Go Plate 16](#) (1064)

DIAGRAMS

Payload Diagram FSB 14T Mk II

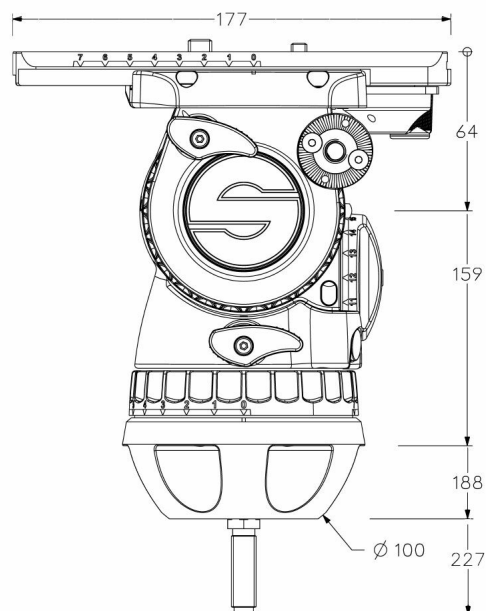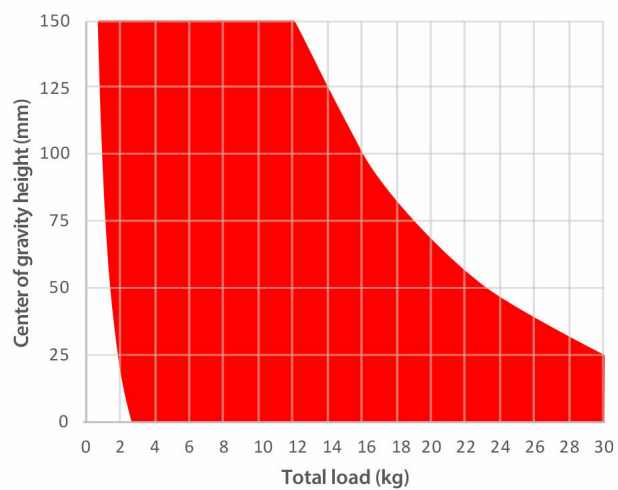

YOU MAY ALSO LIKE...



System FSB 14T Mk II
ENG CF GS



System FSB 14T Mk II
ENG CF MS



System FSB 14T Mk II
HotPod



System FSB 14T Mk II
Ped C III