



FSB 6 Mk II

SKU: S2065-0001

Sachtler FSB 6 Mk II Fluid Head with
Sideload Camera Plate and Pan Bar –
Payload range: 0-8 kg / 0-17.6 lb



PRODUCT DESCRIPTION

Fluid, Smooth, Balanced: Capture the moment precisely

Redesigned with features from the revolutionary Sachtler aktiv fluid head range, FSB delivers precision movement with finely calibrated levels of drag and counterbalance for the perfect shot. The streamlined profile is built to withstand the toughest conditions to deliver repeatable, reliable camera support shot after shot.

Product Highlights

- **Smooth operation.**
Create precision pans with smooth starts and soft stops.
- **Finely balanced.**
Delivering smooth pan-tilt fluid actions to match any camera payload from 0kg.
- **Always on the level.**
Innovative illuminated PrismBubble visible from any height – day or night.
- **Built for endurance.**
Engineered to the highest standards with tough materials and precision components, FSB is built for endurance.

TECHNICAL SPECIFICATIONS




Range	FSB
Temperature Range	-40 °C to 60 °C -40 °F to 140 °F
Camera Plate	Sideload plate S
Payload	0 kg to 8 kg 0 lb to 17.64 lb
Counterbalance	15 + 0 steps
Drag	3 + 0 drag settings
Weight	2.5 kg 5.51 lb
Bowl Size	75 mm
Pan Bar Count	1
Sliding Range	12 cm 4.72 in
Tilt Range	90° to -70°
Pan Bar Length	43 cm to 16.93 in to
Pan Bar Type	Pan bar DV 75
Pan Bar Attachment	16/-/28 mm
Level Bubble	Yes, illuminated
Battery Type	CR2032

IN THE BOX

FSB 6 Mk II fluid head with on pan bar, and sideload plate S

- [Pan bar DV 75](#) (0992SP)
- [Sideload plate S / Ace plate](#) (0164)

DIAGRAMS

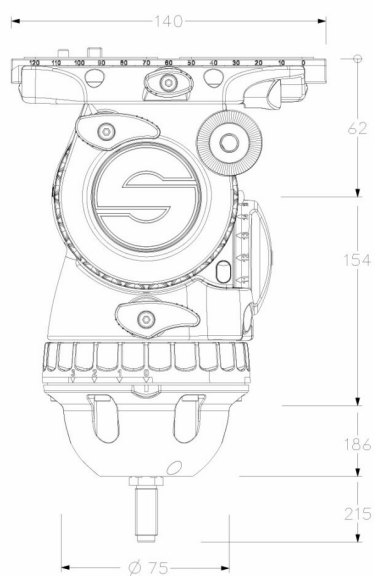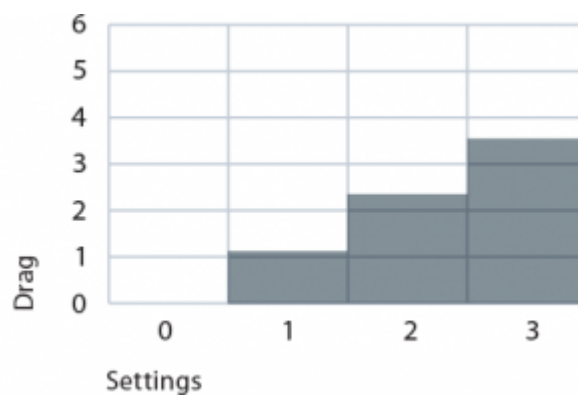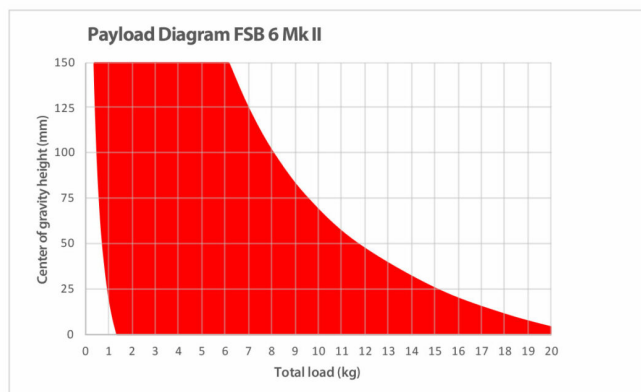

YOU MAY ALSO LIKE...



[System FSB 6 75/2 AL
HD MS Mk II](#)



[System FSB 6 75/2 AL
HD GS Mk II](#)



[System FSB 6 75/2 AL
GS Mk II](#)



[System FSB 6 75/2 CF
GS Mk II](#)