



## System aktiv12T flowtech100 GS

**SKU:** S2074T-FTGS

Sachtler system aktiv12T Touch & Go with  
flowtech100 tripod, ground spreader,  
carry handle and bag



## PRODUCT DESCRIPTION

### Sachtler System aktiv12T flowtech100 with Sideload and ground spreader

Weighing only 7.3 kg (16.1 lbs.) the aktiv12T flowtech100 system is both lightweight and durable, designed to be a long-serving and high-performing part of your kit. This system is the perfect choice for professional medium-sized camcorders and digital cine camera set ups of up to 14 kg (30.9 lbs.). 15 counterbalance steps allow for fast and precise balancing of your camera. Its Touch & Go mechanism with a sliding range of 70 mm make loading and positioning the camera quick and easy. Seven drag settings provide smooth and fast options to adjust drag performance without jolts or vibrations. The illuminated PrismBubble with top or side view makes levelling easy from any height.

## TECHNICAL SPECIFICATIONS

|                                    |                                        |
|------------------------------------|----------------------------------------|
| <b>Height With Ground Spreader</b> | 60 cm to 176 cm   23.62 in to 69.29 in |
| <b>Temperature Range</b>           | -40 °C to 60 °C   -40 °F to 140 °F     |
| <b>Payload</b>                     | 0 kg to 14 kg   0 lb to 30.86 lb       |
| <b>Counterbalance</b>              | 15 + 0 counterbalance steps            |
| <b>Drag</b>                        | 7 + 0 drag settings                    |
| <b>Weight</b>                      | 7.3 kg   16.09 lb                      |
| <b>Bowl Size</b>                   | 100 mm                                 |
| <b>Spreader Type</b>               | Ground spreader                        |
| <b>Material</b>                    | Carbon Fibre                           |
| <b>Tripod Stages</b>               | 2                                      |
| <b>Pan Bar Count</b>               | 1                                      |
| <b>Sliding Range</b>               | 12 cm   4.72 in                        |
| <b>Tilt Range</b>                  | 90° to -70°                            |
| <b>Interface Compatibility</b>     | Touch & Go                             |
| <b>Transport Length</b>            | 87 cm   34.25 in                       |
| <b>Height Without Spreader</b>     | 23 cm to 170 cm   9.06 in to 66.93 in  |

## IN THE BOX



aktiv™12T fluid head with Touch & Go plate 16 and pan bar DV right (telescopic); flowtech® tripod 100 with ground spreader, carry handle, attachment mount; padded bag ENG

- [Touch & Go Plate 16](#) (1064)
- [Pan bar DV right \(telescopic\)](#) (3470)
- [Tripod flowtech® 100 GS](#) (5587)
- [Ground spreader flowtech®](#) (S2058-0001)
- [Carry handle flowtech, rotating](#) (S2051-1062)
- [flowtech® attachment mount](#) (S2051-1900)

- [Padded bag ENG](#) (9104)

## DIAGRAMS

Payload Diagram aktiv12T

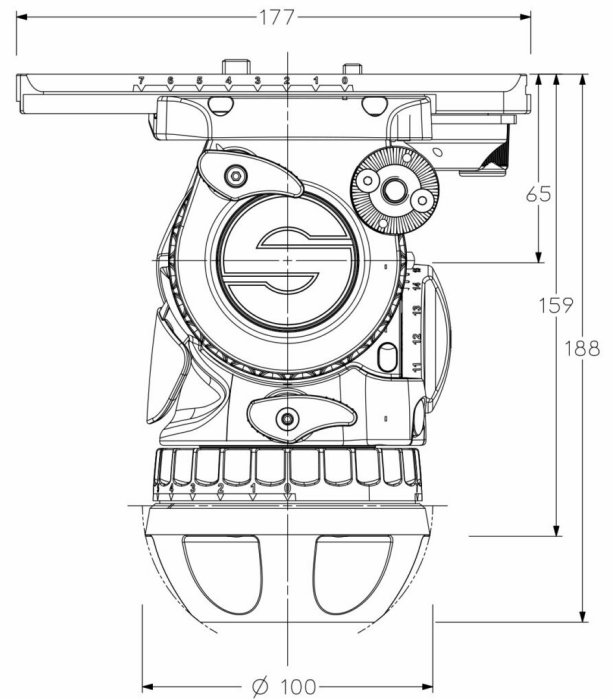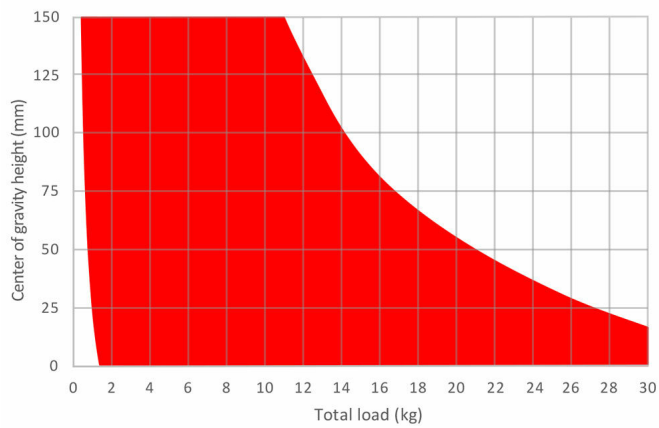

## YOU MAY ALSO LIKE...



[System aktiv14T  
flowtech100 GS](#)



[System FSB 14T Mk II  
ENG CF GS](#)