



System aktiv8T flowtech75 GS

SKU: S2068T-FTGS

Sachtler system aktiv8T Touch & Go with flowtech75 aktiv tripod, ground spreader, carry handle and bag



PRODUCT DESCRIPTION

Sachtler System aktiv8T flowtech75 with Touch&Go and ground spreader

Weighing only 6.6 kg (14.5 lbs.) the aktiv8T flowtech75 system is both lightweight and durable, designed to be a long-serving and high-performing part of your kit. This system is the perfect choice for professional medium-sized camcorders and digital cine camera set ups of up to 12 kg (26.5 lbs.). 15 counterbalance steps allow for fast and precise balancing of your camera. Seven drag settings provide smooth and fast options to adjust drag performance without jolts or vibrations. The illuminated PrismBubble with top or side view makes levelling easy from any height.

TECHNICAL SPECIFICATIONS



Range	aktiv
Temperature Range	-40 °C to 60 °C -40 °F to 140 °F
Height With Ground Spreader	56 cm to 176 cm 22.05 in to 69.29 in
Payload	0 kg to 12 kg 0 lb to 26.46 lb
Counterbalance	15 + 0 counterbalance steps
Drag	7 + 0 drag settings
Weight	6.6 kg 14.55 lb
Bowl Size	75 mm
Spreader Type	Ground spreader
Material	Carbon Fibre
Tripod Stages	2
Pan Bar Count	1
Sliding Range	60 mm 2.36 in
Tilt Range	90° to -70°
Interface Compatibility	Touch & Go
Transport Length	85 cm 33.46 in
Height Without Spreader	23 cm to 170 cm 9.06 in to 66.93 in

IN THE BOX

aktiv8T fluid head with Touch & Go plate S and one pan bar DV 75 right; flowtech75 aktiv tripod with carry handle, attachment mount and ground spreader; flowtech padded bag

- [aktiv8T](#) (S2068T)
- [Tripod flowtech® 75 aktiv GS](#) (4587)
- [Padded bag flowtech®75](#) (9116)
- [Carry handle flowtech, rotating](#) (S2051-1062)

DIAGRAMS

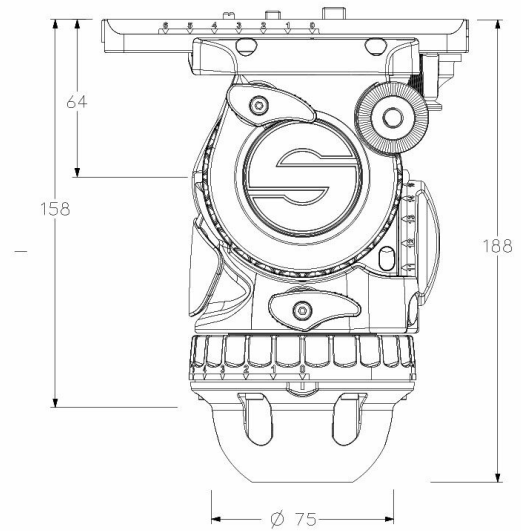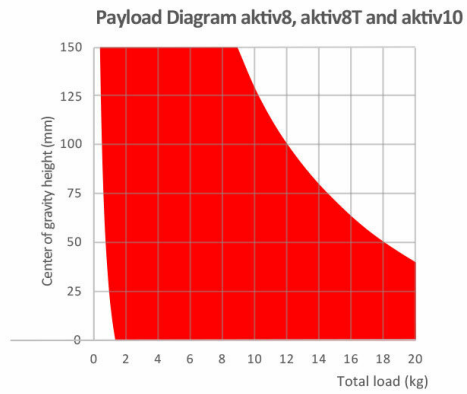

YOU MAY ALSO LIKE...



System aktiv8T
flowtech75 MS



System aktiv8
flowtech75 MS



Lightweight Audio Bag-
Medium



Dr. Bag - 3